


Usage of electrical heating foils by Heat Decor with CLASSEN CERAMIN® flooring



- CLASSEN Ceramin flooring of 3,8 4,5 mm thickness without integrated sound insulation
- Heat Decor Vapor barrier, thickness 0,2 mm, min. SD-75 m

- Heat Decor Heating foils, model "HD-G"
- Heat Decor Sound insulation, thickness 5 mm, 700 kPa (CS)

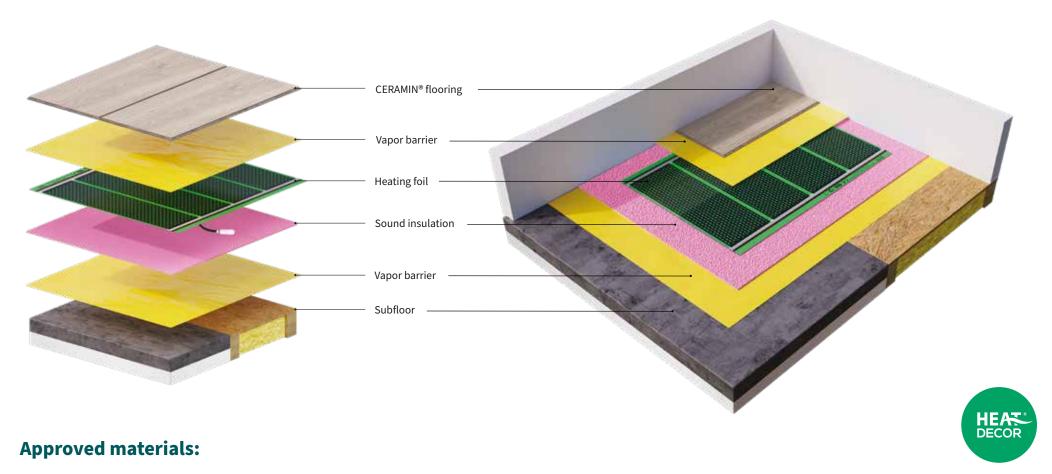

Attention: Thermal restistance $R < 0.15 \text{ m}^2 \text{ K/W}$ (above heating foil). The vapor barrier serves to seal and protect against moisture from above (e.g. cleaning water, spilled beverages) and below, since the operating voltage of the heating system is 230 V.