

Adhesive and sealing recommendation

for CERAMIN[®]-based products in damp areas

EN / Status 01.24

Caution, important!






The following adhesive recommendation does not apply to products with the „Easy Loc“ installation system or to products with integrated sound insulation.

These products are only approved for floating installation. Bonding to the subfloor is therefore not permitted.

- CERAMIN Tiles
- CERAMIN Tiles XXL
- Neo Vario
- CERAMIN Vario


Adhesive recommendation


for CERAMIN-based products


		Ardex	Bostik		CLASSEN	Lugato	Mapei	Murexin	Schönox	Soudal	Thomsit	Uzin	Wakol
Dry area, normal living area	Floor		Parfix Eco Plus	Ardaflex Multi	Multi Connect			MS-K 539 / MS-K 499	Schönox Protect	Fix All Floor & Wall			Wakol MS 260
	Wall	Link to instructions				Link to instructions	Link to instructions				Link to instructions	Link to instructions	
Damp area	W0-I												
	W1-I												
	W2-I												
	W3-I												


Sealing recommendation for rooms with increased exposure to moisture

Explanation of wet duty classes in domestic bathrooms

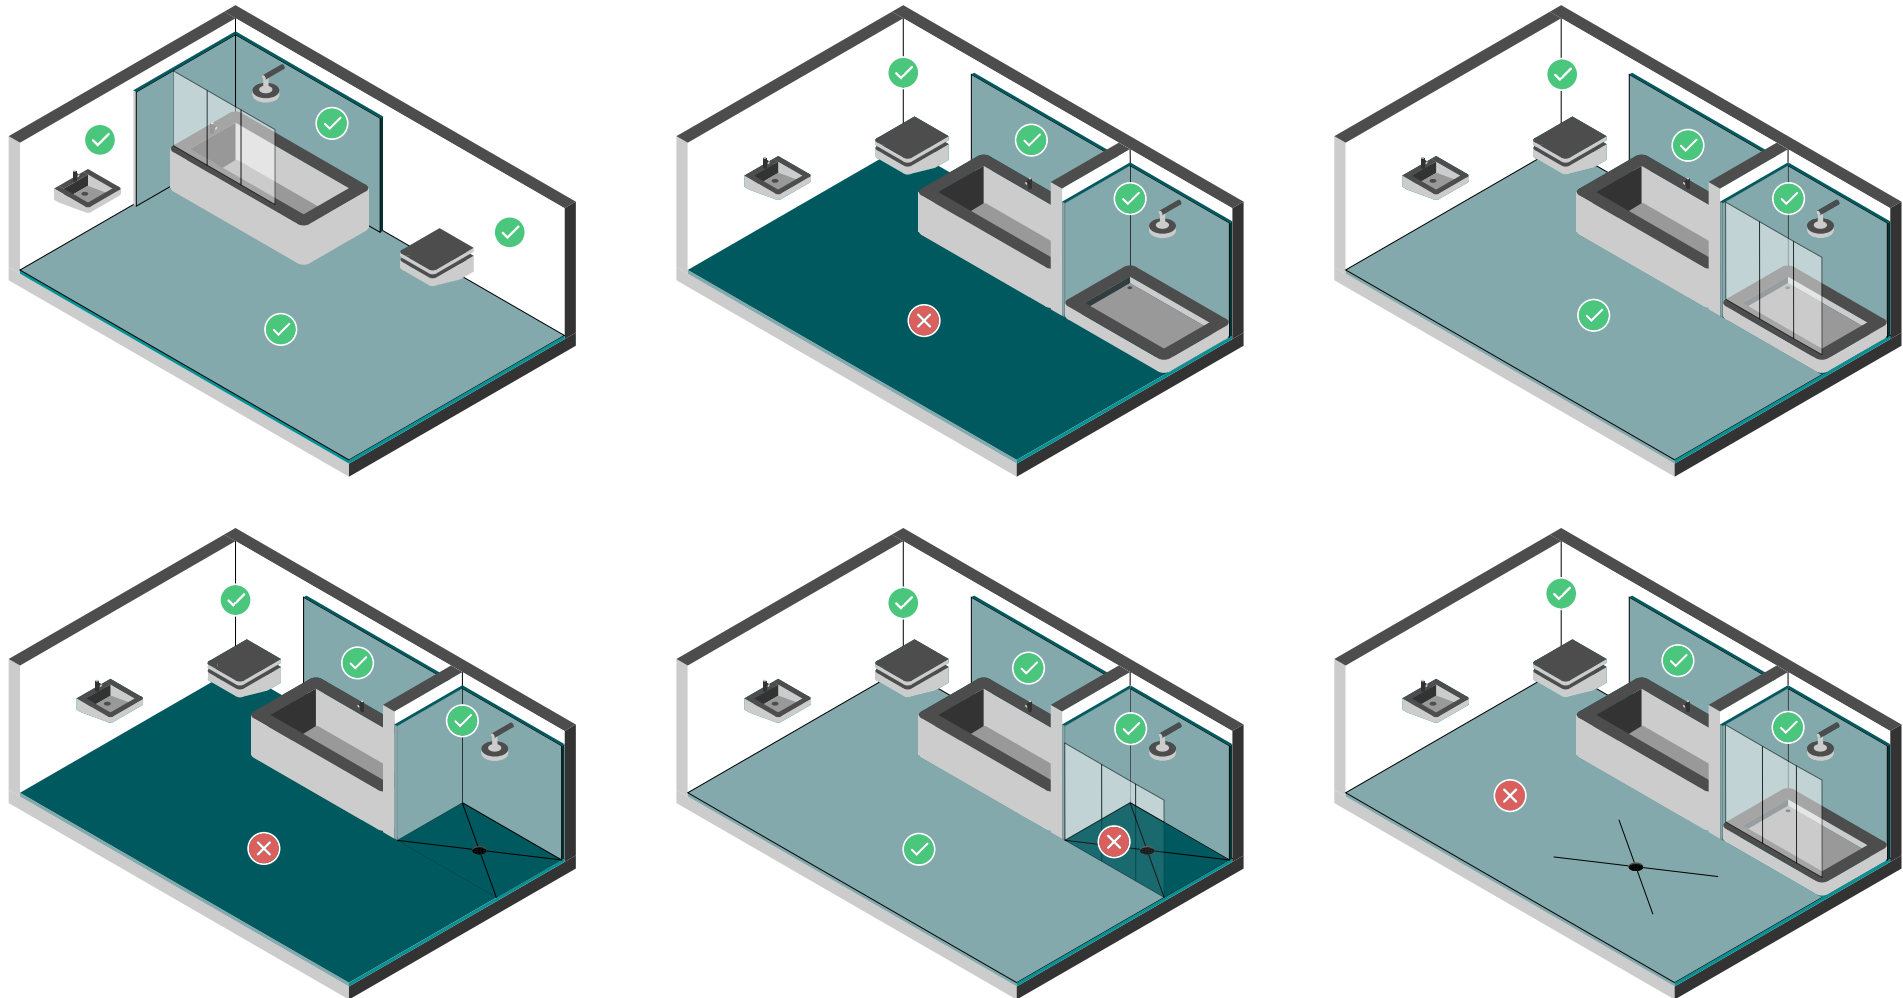

W0-I 

W1-I 

W2-I 

↳ Not permissible with CLASSEN products!